

from **Agri-Alert**

Enjoy a new peace of mind


# WM3000 Wireless Modules

Short range with one way communication only

Designed to operate with the Agri Alert 400, 800, 2400 & 9600.

Open air unobstructed range of up to 3000ft.

Easy to install, easy to program, easy to test.



#### Receiver AA-WM3000 Rx

- Comes with 4 separate input channels.
- Each channel can be wired to individual Agri Alert zones.
- 12 volt dc power input (from Agri Alert aux. supply).
- Easy dip switch programming.
- Mounted in weather proof enclosure.
- Use one or more receivers per Agri Alert panel.



#### Transmitter AA-WM3000 Tx

- Dry contact normally open input terminals.
- Common 9 volt battery power supply.
- Easy dip switch programming.
- Mounted in weather proof enclosure.
- Use one or more transmitters per Rx channel.
- Low battery and re-transmit features included.

**PR-3000**



- Pager is a 4 channel portable receiver (similar to the WM3000Rx).
- Can be used with any WM3000Tx transmitters.
- Has same 3000 feet line-of-sight range as WM3000Rx.
- Can be set to vibrate, tone, or both on an alarm.
- Comes with built-in re-chargeable battery and charger.
- Gives time and date stamp of alarms.

**WM3000TA**



- independent mechanical temperature sensor.
- provides both high and low temp alarms.
- can be wired directly into AA-WM3000Tx input.
- easily adjust high and low set points.


**Typical Wireless Installation Layout**

Overcome the distance and topography problems of hardwire:

- risky digging situations (presence of buried pipes, cables, etc)
- obstacles that impede the connection between buildings (roads, fields, rivers, etc)

- buildings that are spaced a long way apart
- reduce chances of damage caused by transient lightning

**Up to 3000 feet apart**

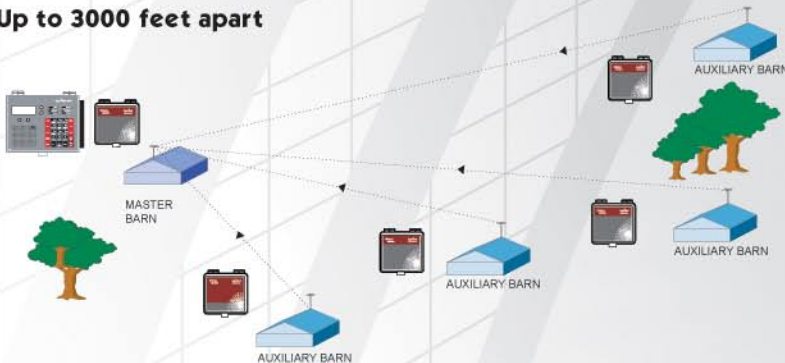

5200 Armand-Frappier  
St-Hubert, Quebec  
Canada J3Z 1G5

Toll free : 1-888-844-0103  
Fax : (450) 926-2780

sales@viatron-electronics.com  
www.viatron-electronics.com