


CVS-24H

Controller with 2 Variable & 4 ON/OFF

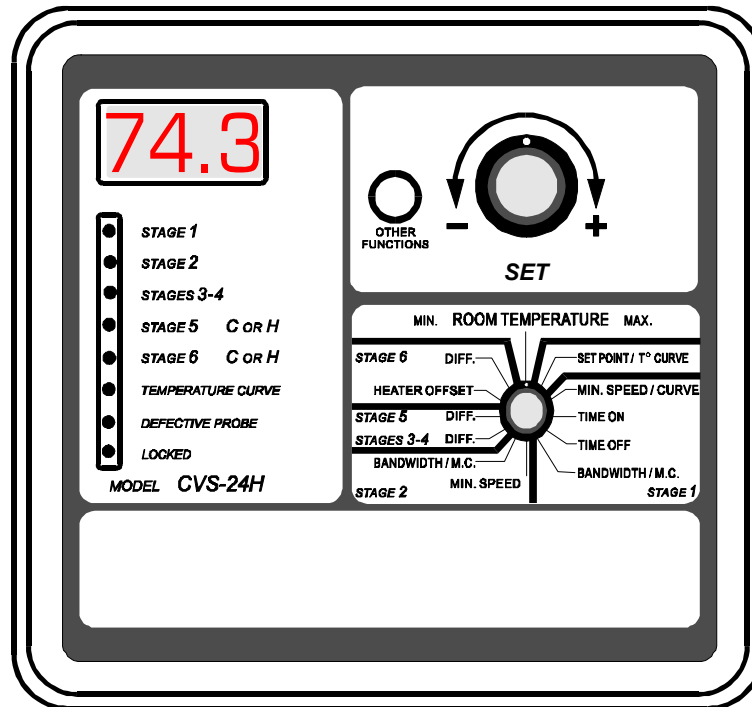

Features

- Digital display with pilot light indicating status
- Timed minimum ventilation de-icing stage 2
- Curve to automatically adjust Set point and Minimum speed
- Up to four inside temperature probes
- Individual probe readout
- Up to two stages of heating
- Last cooling stage can be a timed mist stage
- Computer Compatible
- Overload and overvoltage protection
- Parameter protection (Lock Mode)
- Can be powered with 115/230 Vac (60Hz) or 12Vdc