


DVS-25HA

Controller with 2 Variables & 3 ON/OFF and Alarm

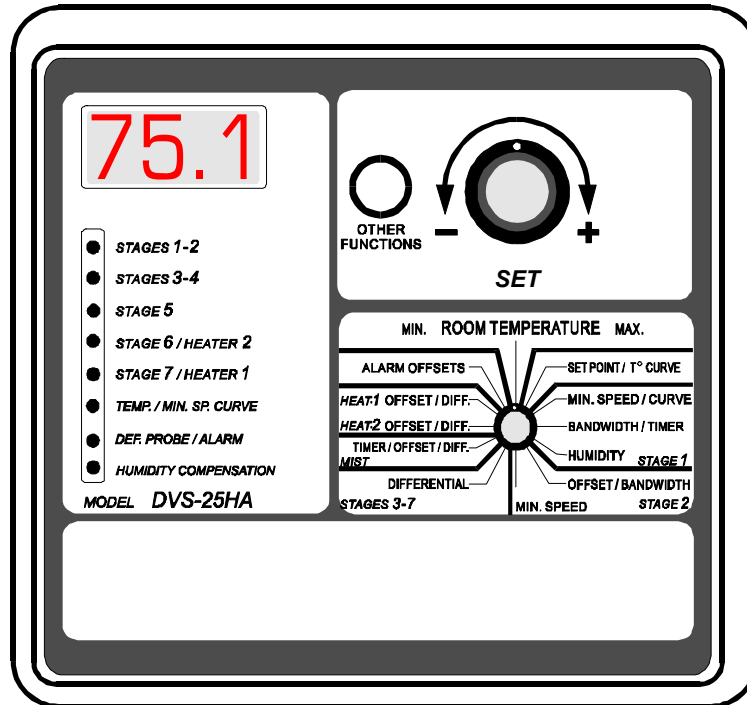

Features

- Merges stage 1 and 2
- Timer for minimum ventilation and de-icing cycle stage 2
- Curve to automatically adjust Set point and Minimum speed
- Up to 4 inside temperature probes with individual readout
- Alarm contact on High, Low Temperature and power failure
- Possible to monitor relative humidity
- Humidity compensation for heat or increases fan speed of stage 1 (optional)
- Mist stage with humidity cut-off
- Up to two stages of heater (zoned)
- Test Mode
- Computer Compatible
- Compensation for band width with Interface
- Overload and overvoltage protection
- Can be powered with 115/230 Vac (60Hz) or 12Vdc