


Technical Bulletin

CVS-21HA

Controller with 2 Variable & 1 ON/OFF and Alarm

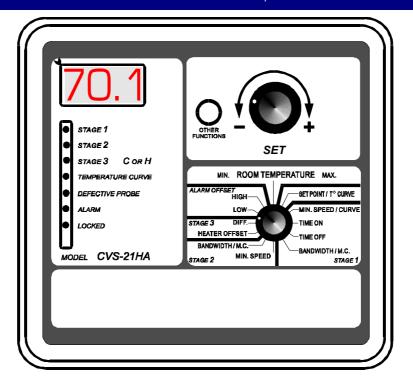

Features

Digital display with pilot light indicating status

Timed minimum ventilation de-icing stage

Curve to automatically adjust Set point and Minimum speed with animal's age

10 different motor curves for the variable stages

Up to four inside temperature probes

Individual probe readout

Alarm contact and up to two stages of heating

Computer Compatible

Overload and overvoltage protection

Parameter protection (Lock Mode)

Can be powered with 115/230 Vac or 12Vdc