


Varifan[®] Easy to Use Ready to Operate

FORCED NATURAL AND TUNNEL VENTILATION PROGRAMMABLE LOGIC

Multistage 10 Computer

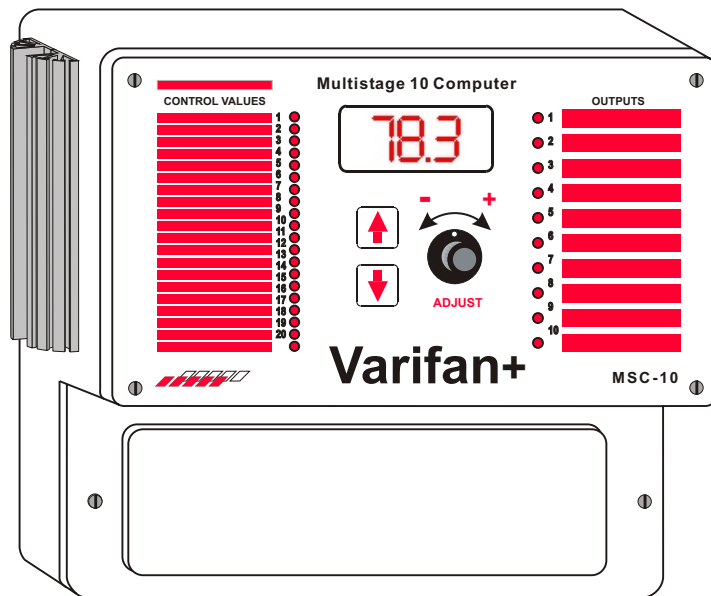

**Expandable to 10 stages
by adding up to 2 modules**

OPTIONS:


4 PROBES

- Inside/outside temperature
- Humidity (RHP-1)
- Static pressure
- Standby probe

6 STAGES

- Built in stages
- 2 variables
- 4 on/off

Multistage 20 Computer

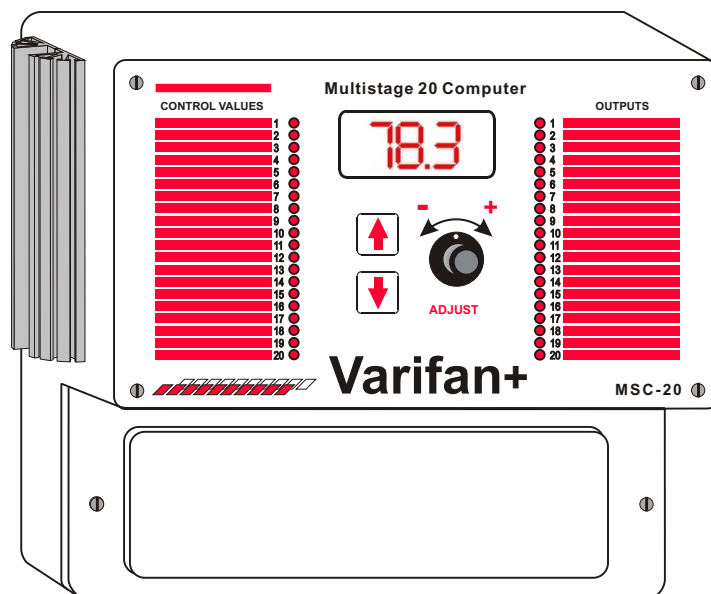

OPTIONS:

8 PROBES


- Inside temperature
- Outside temperature
- Humidity (RHP-1)
- Static pressure
- Feed/water consumption with PC
- Standby probe

20 STAGES


- Variable fans (max. 6 stages)
- On/Off 1½ HP fans
- Cool cells
- Sprinklers
- Inlets
- Curtains
- Heaters

Can be connected to a PC with RCM-40 or PCI-20


Choice of 6 types of modules For IC and MSC Controls

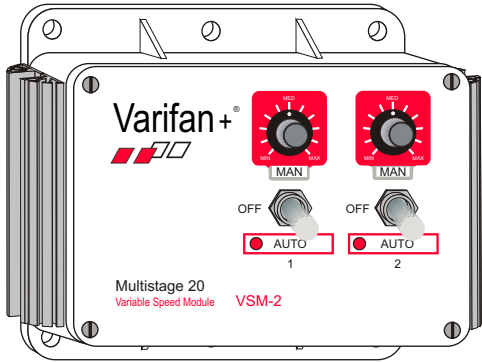


VSM-2
Variable Speed Module (max. 3)
2 variable stages 6 Amp nom. each
(0.1 Amp-6 Amp)

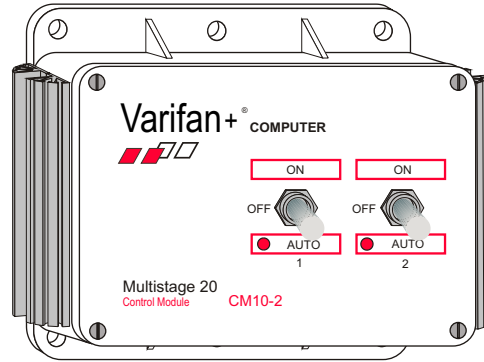


CM10-2
Control Module, 2 single speed
stages 10 Amp each
(0.1 Amp-10 Amp) 1½ hp @ 220v

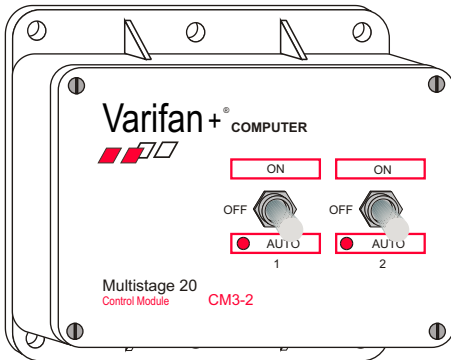


CM3-2
Control Module, 2 on/off stages
4 Amp each (2 mAmp-4 Amp)
1 hp @ 220v

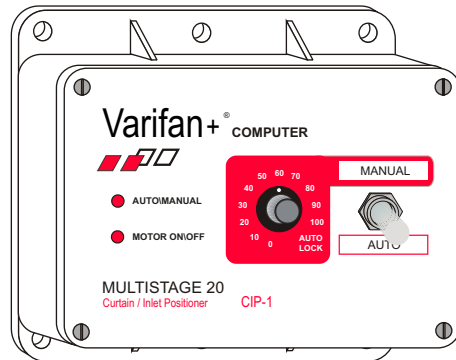

CIP-1
Curtain and Air Inlet Positioner
(2 mAmp-3 Amp) 1 hp @ 220v

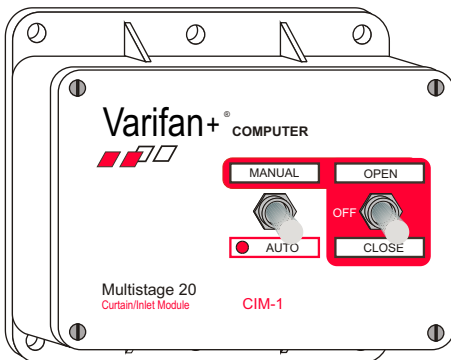

CIM-1
Curtain, Air Inlet and 2 Speed
Motors Module
(2 mAmp-4 Amp) 1 hp @ 220v



ARM-1
Alarm Relay Module
(8 second delay)



Vostermans Ventilation Inc.
2439 South Main St.
Bloomington, IL. 61704
Tel. 309-827-9798
Fax 309-829-1993
ventilation@us.vostermans.com
www.vostermans.com

Mexico Office
Queretaro, Qro.
Cell 52 442 200 9507
Tel. 52 442 213 9384
Fax 52 442 213 9384
multifanmex@aol.com

