


Ventra 1200 Decal Installation Instructions

Tools Needed

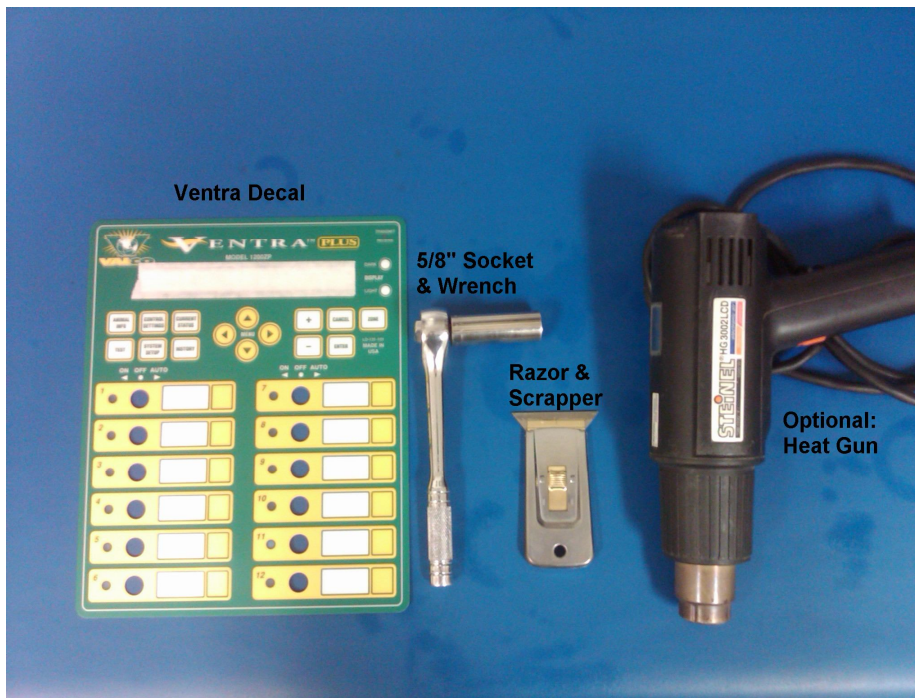


Step 1: Power down Ventra 1200 controller from breaker box


Step 2: Remove toggle switch boots with 5/8" socket and wrench



Step 3: Unplug toggle switch ribbon cables and remove toggle switch boards from cover. Unplug green decal ribbon cable from front board.

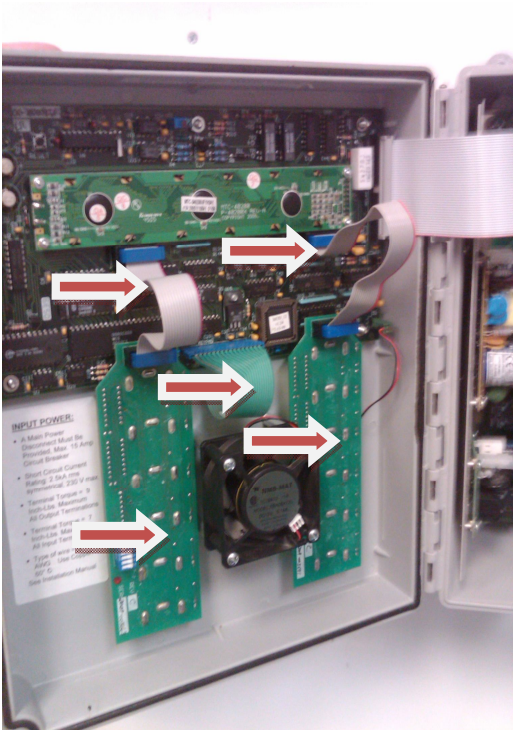

Before

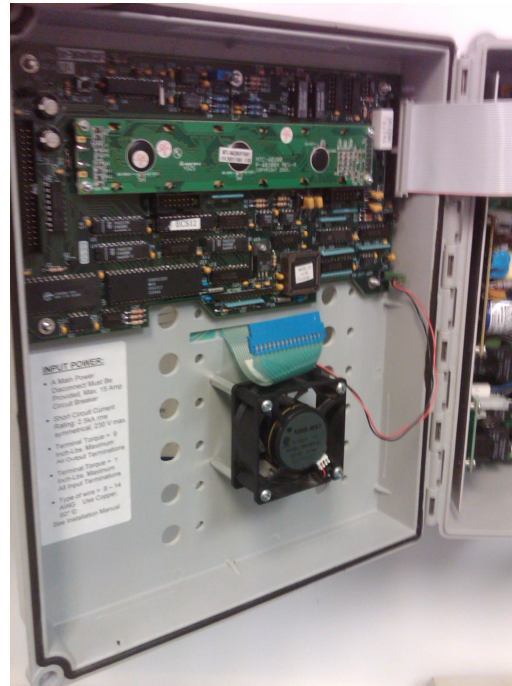

After


Step 4: Remove Ventra decal. Make sure you pull green ribbon cable from decal through slot on cover.




Step 5: Remove remaining glue from cover with scrapper & razor.
Optional: Heat up surface with heat gun for easy removal of glue.
Once glue is removed clean surface.




Step 6: Remove backing on new decal. Insert green ribbon cable through slot on cover. Attach decal to cover. Make sure you line up decal using toggle switch holes on cover (DO NOT BEND THE DECAL)

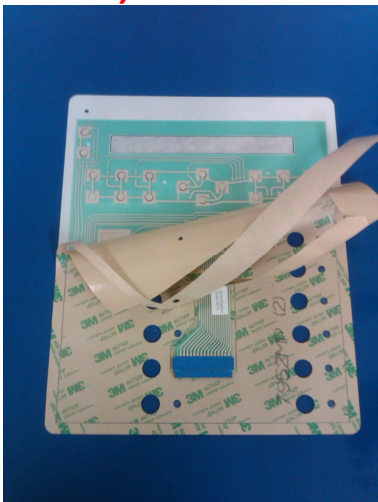

Step 7: Reinstall toggle switch board. Plug toggle switch ribbon cables and green decal ribbon cable into front board.

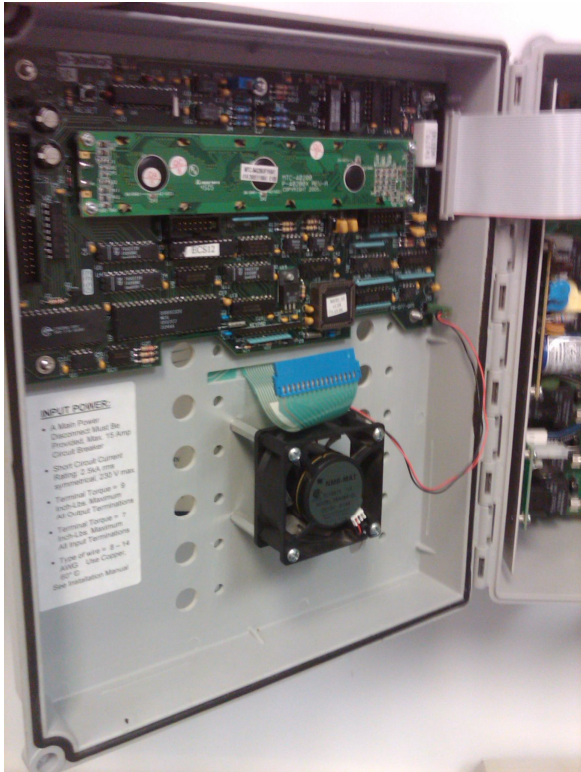

Before

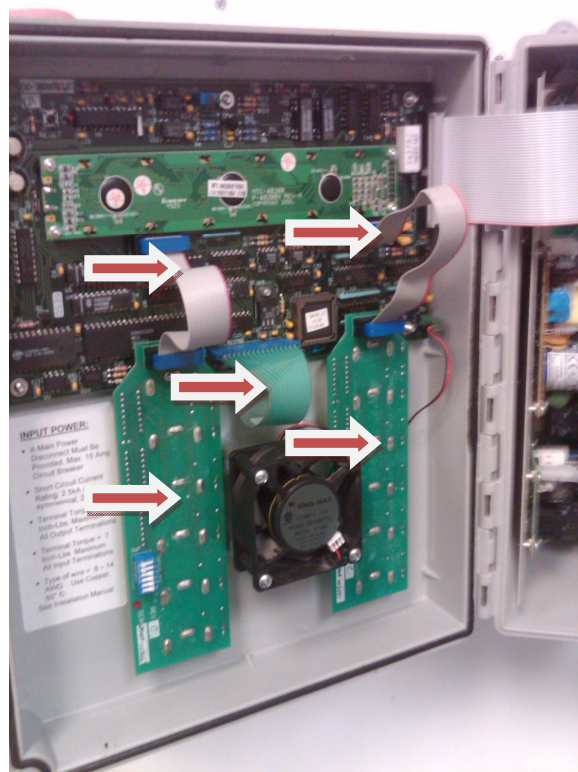

After

Step 8: Install toggle switch boots with 5/8" socket and wrench

