


Technical Bulletin

CS-12H

Twelve On/Off stage controller

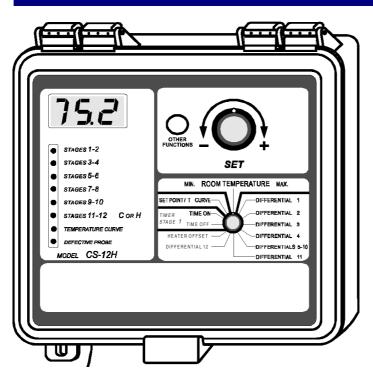

Features

Digital display with pilot light indicating status

Timed minimum ventilation

Curve to automatically adjust Set point with animal's age

Up to four inside temperature probes

Individual probe readout

Up to two stages of heating

Computer Compatible

Overload and overvoltage protection

Parameter protection (Lock Mode)

Can be powered with 115/230 Vac (50 & 60Hz) or 12Vdc